


Matrox **Morphis QxT** >>

Multi-channel video capture board with real-time multi-channel MPEG-4 encoding.

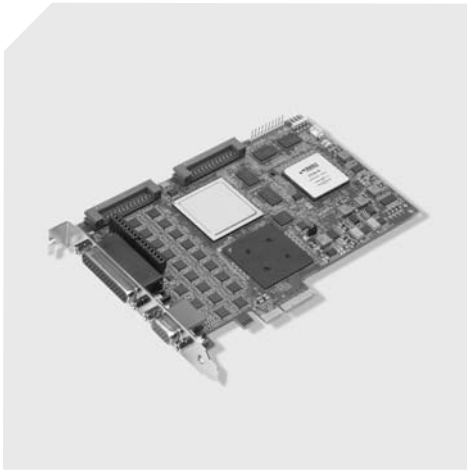

Key features

- x4 PCIe™ short card
- simultaneously capture from up to 16 independent CVBS video sources
- accepts NTSC, PAL, RS-170 and CCIR video standards
- real-time multi-channel MPEG-4 encoder
- 16 audio inputs¹
- 32 TTL auxiliary I/Os
- watchdog timer for monitoring overall system integrity
- available software is sold separately and includes Matrox Imaging Library (MIL)/ActiveMIL and MIL-Lite/ActiveMIL-Lite
- support for Microsoft® Windows® XP and Linux^{2,3}

Versatile design

Matrox Morphis QxT is a cost-effective peripheral board ideal for surveillance applications that require capture from multiple standard video sources with no latency. A modular design and simple standard connections provide additional flexibility and cost savings for video surveillance applications that require a scalable number of inputs. An on-board real-time multi-channel MPEG-4 encoder for video archiving and/or transmission makes Matrox Morphis QxT ideal for demanding surveillance applications.

16 video decoder architecture

Matrox Morphis QxT allows for the simultaneous capture from up to 16 independent standard video sources. A large dedicated buffer guarantees reliable image capture to the host PC, including display, and/or to the real-time multi-channel MPEG-4 encoder. Moreover, video images can be formatted in real-time during capture. Formatting features include cropping (ROI), horizontal and/or vertical flipping and subsampling.


Real-time multi-channel MPEG-4 encoding with audio

Matrox Morphis QxT integrates a real-time multi-channel MPEG-4 encoder. MPEG-4 is the ISO/IEC standard developed by MPEG (Moving Picture Experts Group), which provides an optimal compression ratio without compromising quality, ideal for the transmission of video over a medium with restricted bandwidth or for maximizing video storage. The real-time multi-channel MPEG-4 encoder supports 16 CIF⁴ or four full D1⁵ video streams at once. Up to 16 mono audio inputs can also be encoded (ADPCM⁶) synchronized to and along with the video with a sampling rate from 8KHz to 48KHz.



Preliminary

» Matrox Morphis QxT

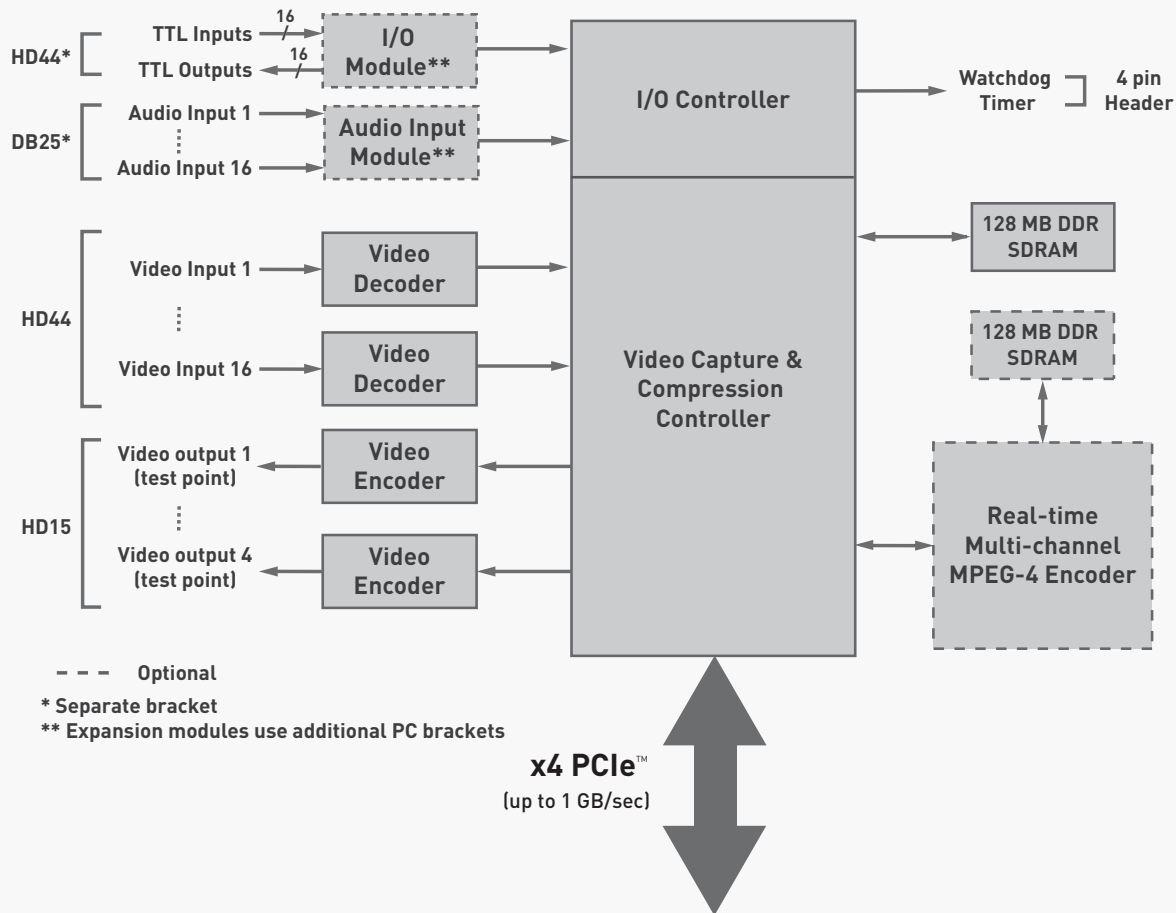

Accessory functionality

In addition to the core video capture and compression functionality, Matrox Morphis QxT incorporates a variety of features to simplify overall integration. These features include an integrated watchdog timer for automatically recovering from application or system failure, integrated auxiliary I/Os that eliminate the need for a separate I/O board, and four video outputs to test incoming video signals (i.e., video loopback).

Software

Software support is available for Microsoft® Windows® XP and Linux^{2,3}, and consists of Matrox Imaging Library (MIL)/ActiveMIL or MIL-Lite/ActiveMIL-Lite development toolkits for creating custom applications.

Preliminary

Specifications

Acquisition

- analog composite (CVBS) NTSC/PAL/RS-170/CCIR
- connect and simultaneously capture from up to 16 independent video sources
- square pixel digitization
- input cropping (ROI capture)
- horizontal and/or vertical flip
- subsampling to 1/16th of a field or frame
- controllable automatic gain control (freeze with manual adjust)
- BGR32 packed, BGR24 packed, RGB planar, YUV422 packed and MONO8 pixel formats

Compression

- MPEG-4 compression
- handles monochrome and color (YUV422) video
- programmable resolution and frame rate
- bit rate control
 - constant
 - variable with maximum rate
 - variable with minimum quality factor
- programmable GOP (Group of Picture)
- real-time performance including four D1 (720 x 480/576) or 16 CIF (352 x 240/288) video streams simultaneously
- interlaced encoding (D1 only)
- mono audio encoded in ADPCM with a sampling rate from 8 kHz to 48 kHz and added to the MPEG-4 stream¹

Host interface

- x4 PCIe™ host interface
- interrupts for start and end of field, frame, and sequence capture

Connectors

- HD-44 for composite video signals
- HD-15 for video test signal outputs
- DB-25 for audio inputs
- HD-44 for TTL I/Os

Dimensions and environmental information

- MORQ/16VD/M4 and MORQ/16VD: 16.76 cm L x 11.18 cm H (6.6" x 4.4")⁷
- MORQ-AUDIO: 5.59 cm L x 9.14 cm H (2.2" x 3.6")⁷
- MORQ-I/O: 3.81 cm L x 9.40 cm H (1.5" x 3.7")⁷
- operating temperature: 0° C to 55° C (32° F to 131° F)
- relative humidity: up to 95% (non-condensing)
- FCC class B
- CE class B
- RoHS-compliant

Corporate headquarters:

Matrox Electronic Systems Ltd.
1055 St. Regis Blvd.
Dorval, Quebec H9P 2T4
Canada
Tel: +1 (514) 685-2630
Fax: +1 (514) 822-6273

Software Environment

- host driver for Microsoft® Windows® XP and Linux^{2,3}
- programmed under Microsoft® Windows® using MIL/MIL-Lite (C DLLs) with Microsoft® Visual C++® (.NET 2003)
- programmed under Microsoft® Windows® using ActiveMIL/ActiveMIL-Lite (ActiveX controls) with Microsoft® Visual Basic®.NET 2003 or C++® .NET 2003
- programmed under Linux using MIL/MIL-Lite with GNU Compiler Collection (GCC)^{2,3}

Ordering Information

Hardware

Part number	Description
MORQ/16VD/M4*	Standard analog color/monochrome x4 PCIe™ frame grabber with 16 video decoders and integrated MPEG-4 video encoder.
MORQ/16VD*	Standard analog color/monochrome x4 PCIe™ frame grabber with 16 video decoders.
MORQ-AUDIO*	Add-on module for 16 audio inputs.
MORQ-I/O*	Add-on module for 32 TTL I/Os.

Ordered separately: Software

Part number	Description
MIL LITE 8 WIN	MIL-Lite board control library for Windows® XP (see MIL-Lite brochure for more details).
MIL 8 WIN P or U	Matrox Imaging Library (MIL) for Windows® XP (see MIL brochure for more details).
MIL LITE 8 LNX ^{2,3}	Mil-Lite board control library for Linux (see MIL brochure for more details).
MIL 8 LNX U ^{2,3}	Matrox Imaging Library (MIL) for Linux (see MIL brochure for more details).

Notes:

1. Only available as part of the MPEG-4 stream.
2. Contact local representative or Matrox Imaging Sales for availability.
3. Contact local representative or Matrox Imaging Sales for supported distribution.
4. Common Intermediate Format (CIF) or 352 x 240 resolution in NTSC and 352 x 288 resolution in PAL.
5. 720 x 480 resolution in NTSC and 720 x 576 resolution in PAL.
6. Adaptive Differential Pulse-Code Modulation (ADPCM).
7. Dimension from bottom edge of goldfinger to top edge of board.

For more information, please call: 1-800-804-6243 (toll free in North America) or (514) 822-6020 or e-mail: imaging.info@matrox.com or <http://www.matrox.com/imaging>

matrox

All trademarks by their respective owners are hereby acknowledged. Matrox Electronic Systems, Ltd. reserves the right to make changes in specifications at any time and without notice. The information furnished by Matrox Electronic Systems, Ltd. is believed to be accurate and reliable. However, no responsibility license is granted under any patents or patent rights of Matrox Electronic Systems, Ltd. Windows and Microsoft are trademarks of Microsoft Corporation. MMX and the MMX logo are registered trademarks of Intel Corporation. Printed in Canada, 10-17-2006. **5E-5398-B**