



Retaining Ring


Threaded retaining ring with the wrenching slots on the object side, 1.8mm Nominal Thickness x M22.5 x P0.5

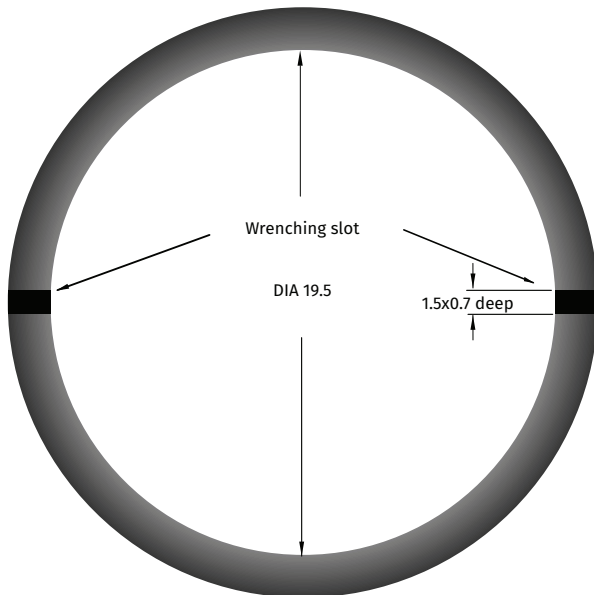

Profile View

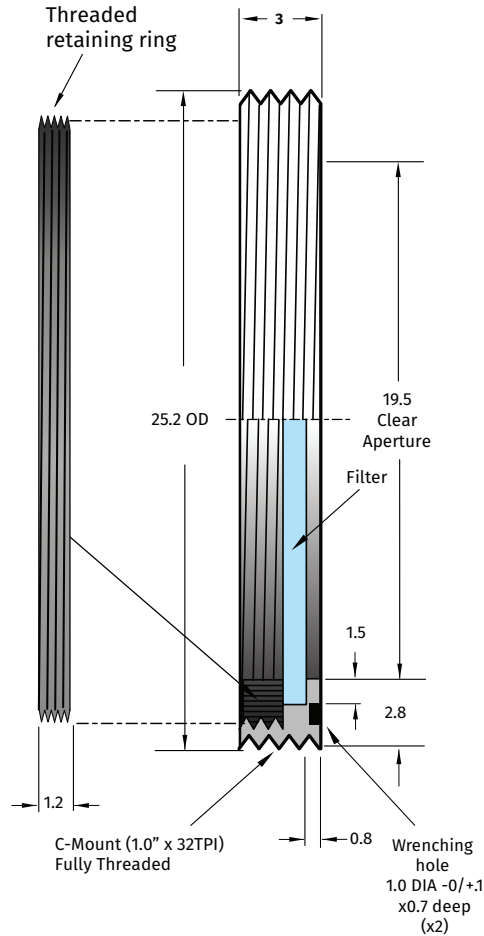

Front View

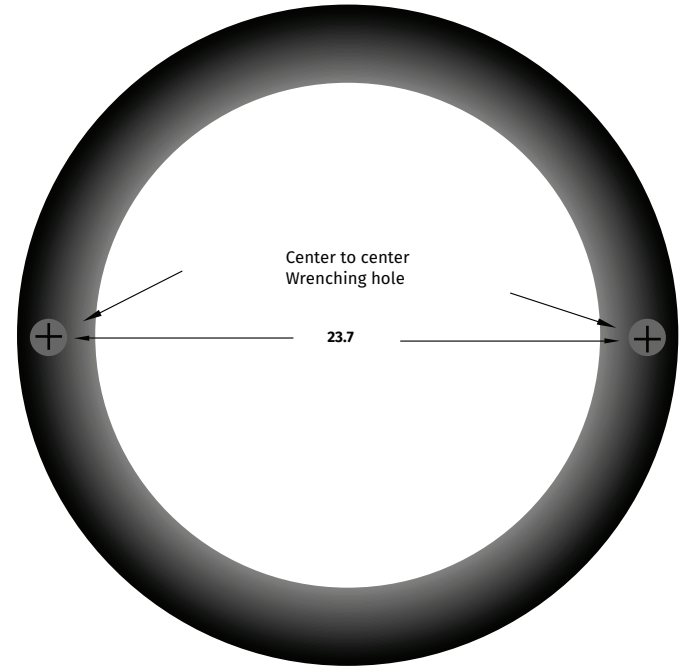

Authorized Distributor:



Your single source for Imaging Solutions

42501 Albrae Street, Suite 210
Fremont, CA 94538
Ph. 510.657.4000 Fax 510.657.4010
info@uniforcesales.com
www.uniforcesales.com

GENERAL TOLERANCE +/-0.1mm

NOTES:

1. Filter mount and retaining ring are black anodized aluminum.
2. This threaded filter screws into any C- or CS-mount camera so it is positioned directly in front of the sensor. Wrenching slots on the retaining ring aid in threading the filter into the camera body. A lens spanner wrench, pointed object or the upper anvils of a pair of vernier calipers can be used as wrenching tools. After installing the filter, the lens is threaded into the camera and the filter then sits immediately behind the lens.
3. Do not scale drawing. All dimensions are in mm.

MIDOPT
MIDWEST OPTICAL SYSTEMS, INC.
Machine Vision Filters, Lenses and Accessories

M25.4-C-MOUNT