

# PHORCE (standalone version)

## PRODUCT BRIEF

The PHORCE product family is designed to extend the SuperSpeed USB3.0 connections beyond the typical 3 meter reach of copper cables. The standalone version of PHORCE consists of two individual modules. A PC module directly connects to any USB3.0 port on a host such as a PC. A separate RE module (remote module) connects to user's USB 3.0 devices such as a camera, external hard drive, control panel, or any other USB3.0 compatible devices. By placing an optical fiber between the PC and RE modules, the PHORCE system can achieve a 300m link distance with a choice of SM or MM fibers. By incorporating swappable optical transceivers, PHORCE can be deployed to any existing fiber networks without opening walls or digging trenches.

## KEY FEATURES

- ❖ Provide 5Gb/s transmission bandwidth
- ❖ Supports any USB3.0 device connection but not backward compatible with USB2.0
- ❖ Compatible with MM, SM fibers and CWDM technologies
- ❖ Available for one fiber solution (LC simplex)
- ❖ Plug and Play, no drivers required
- ❖ LED indicators for system status
- ❖ Low power consumption ~2W while operating
- ❖ Provide USB bus power for USB devices
- ❖ Secure power connector with locking mechanism
- ❖ Secure USB connectors with thumbscrew locking mechanism
- ❖ Secure installation with mounting wings
- ❖ Provide optical isolation
- ❖ Compact size

## APPLICATIONS

- ❖ Long distance USB3.0 accessories connections
- ❖ USB3Vision applications
- ❖ Machine vision applications
- ❖ Intelligent traffic control systems
- ❖ Security surveillance systems
- ❖ Remote data storage systems
- ❖ Automation inspection systems
- ❖ High resolution images and real-time analysis for science, sports and automobile tests

**PHRONTIER™**  
TECHNOLOGIES

## PHORCE

### USB 3.0 Optical Fiber Extender

PHU30-M  
PHU30-S  
PHU30-SL  
PHU30-Cxx



Authorized Distributor:

 **UNIFORCE**  
SALES AND ENGINEERING


Your single source for Imaging Solutions

Ph. 510.657.4000

info@uniforcesales.com

www.uniforcesales.com

## TYPICAL SET UP DIAGRAM

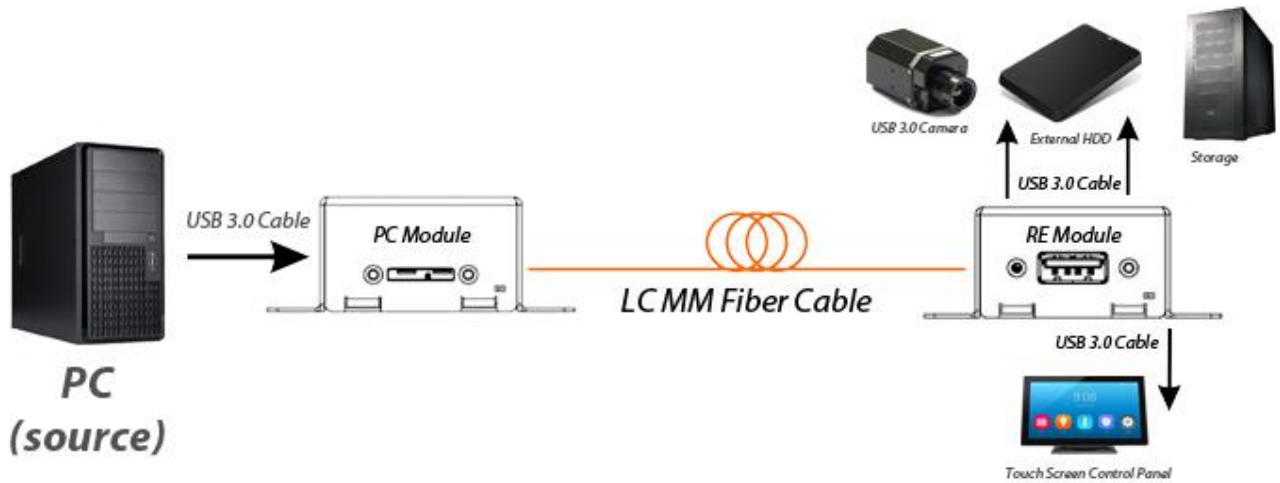

## TECHNICAL SPECIFICATIONS

### Module Specifications

Available Models		PHU30-M	PHU30-S	PHU30-SL	PHU30-Cxx
Max Link Distance*		300 m (1000 ft)			
Wavelength		850nm	1310nm	1270/1330nm	CWDM grid
Required number of fibers		2	2	1	2
Optical Connector Type		LC Duplex	LC Duplex	LC Simplex	LC Duplex
Fiber Type		OM2 or OM3 MM	9/125 um SM		
Input Voltage		5V DC			
Typical Power Consumption		2W excluding USB bus powered devices			
Operating Temperature (standard version)	Case	0 ~ 65 °C			
	Ambient	0 ~ 50 °C			
Operating Temperature (industrial version)	Case	-40 ~ 80 °C			-20 ~ 80 °C
	Ambient	-40 ~ 65 °C			-20 ~ 65 °C
Storage Temperature		-40 ~ 85°C			
Dimensions (L x W x H) excluding mounting wings		72 x 38 x 22 mm 2.83 x 1.5 x 0.88 inches			
Weight		PC module: 53g ; RE module: 58g			




\* The link distances are estimated with 50/125um OM3 MM fiber and 9/125um SM fiber.

### Power Supply Specifications




AC Input	100 ~ 240V AC
DC Output	2.0 A @ 5V DC
DC Jack Polarity	Center 5V
DC Jack Part Number	Switchcraft S760K

## MECHANICAL INFORMATION (mm)[inch]

### RE Module

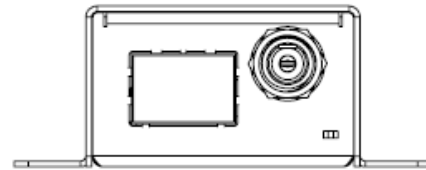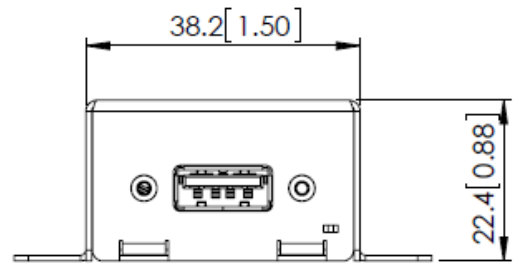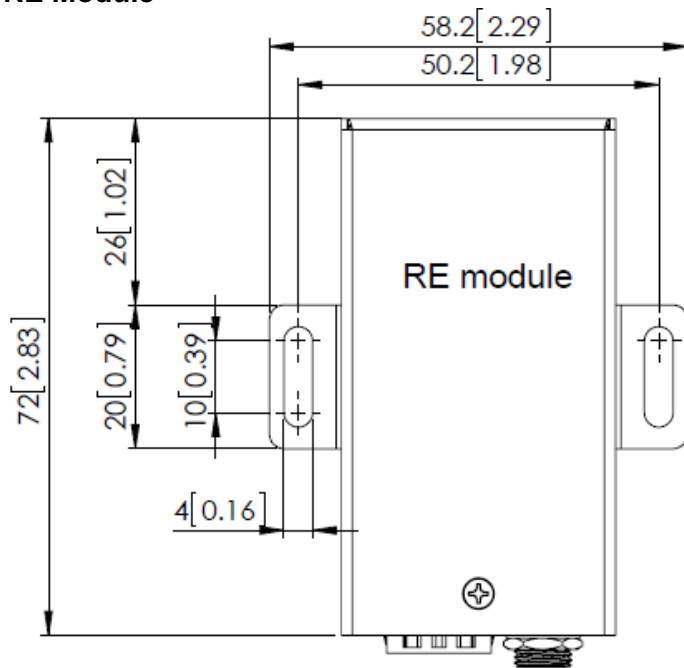

### PC Module

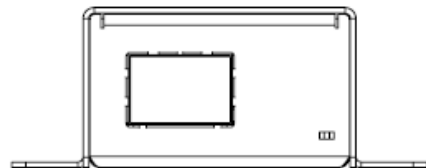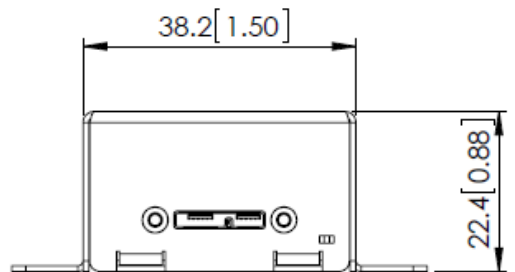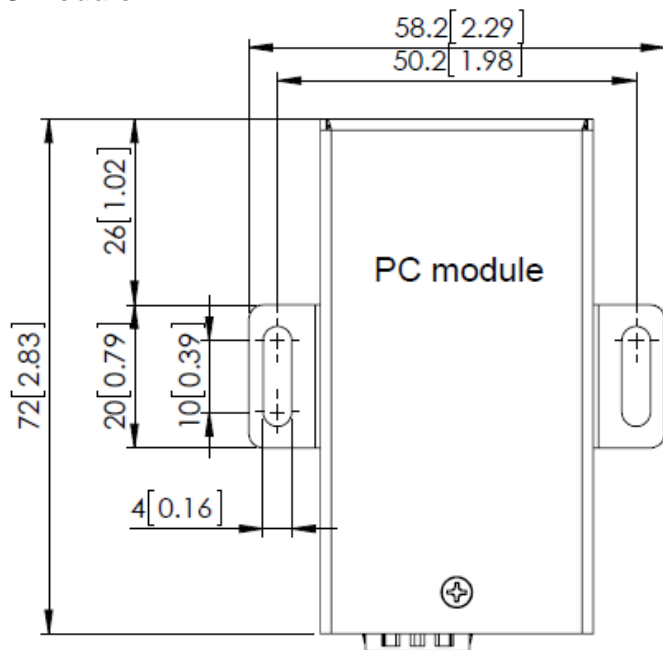

## ORDERING INFORMATION

### Standard models

Ordering Part #	Link Distance	Fiber type	Connector type	Items included
<b>PHU30-M</b>	300m (1000 ft)	2x OM2 or OM3 MM fiber	LC duplex	1x PHU30-M-PC module 1x PHU30-M-RE module 1x 10W wall mount power supply
<b>PHU30-S</b>	300m (1000 ft)	2x SM fiber	LC duplex	1x PHU30-S-PC module 1x PHU30-S-RE module 1x 10W wall mount power supply
<b>PHU30-SL</b>	300m (1000 ft)	1x SM fiber	LC simplex	1x PHU30-SL-PC module 1x PHU30-SL-RE module 1x 10W wall mount power supply

### Industrial models

Add "-T" at the end of the standard model part number.

### CWDM models (user needs to specify wavelength for both -PC and -RE device)

Ordering Part #	Tx Optical Wavelength	Rx Optical range	Connect or type	Items included
<b>PHU30-C27-xx</b>	1270 nm	1260 ~ 1620 nm	LC duplex	1x PHU30-Cxx-PC module 1x PHU30-Cxx-RE module 1x 10W wall mount power supply
<b>PHU30-C29-xx</b>	1290 nm			
<b>PHU30-C31-xx</b>	1310 nm			
<b>PHU30-C33-xx</b>	1330 nm			
<b>PHU30-C35-xx</b>	1350 nm			
<b>PHU30-C37-xx</b>	1370 nm			
<b>PHU30-C39-xx</b>	1390 nm			
<b>PHU30-C41-xx</b>	1410 nm			
<b>PHU30-C43-xx</b>	1430 nm			
<b>PHU30-C45-xx</b>	1450 nm			
<b>PHU30-C47-xx</b>	1470 nm			
<b>PHU30-C49-xx</b>	1490 nm			
<b>PHU30-C51-xx</b>	1510 nm			
<b>PHU30-C53-xx</b>	1530 nm			
<b>PHU30-C55-xx</b>	1550 nm			
<b>PHU30-C57-xx</b>	1570 nm			

# PHU30-M/S/SL/Cxx

PHU30-C59-xx	1590 nm			
PHU30-C61-xx	1610 nm			

## Accessory

Part #	Description
618-TRG10R-5V-SW	10W AC/DC adapter with 5V DC output
LC-LC-MD-xxM2	LC to LC duplex 50/125 $\mu$ m OM2 MM fiber. xx = desired length in meters.



Authorized Distributor:



*Your single source for Imaging Solutions*

Ph. 510.657.4000

[info@uniforcesales.com](mailto:info@uniforcesales.com)

[www.uniforcesales.com](http://www.uniforcesales.com)

---

Phrontier<sup>®</sup> and PHORCE<sup>™</sup> are trademarks of Phrontier Technologies, LLC. All rights reserved. Copy Right © 2010-2016